


Inquiry machine- Capacitive Touch Digital Signage



High-Performance
Chip



Large Storage
Capacity



Low Power
Consumption



Finger or Cap Stylus
Touch Control



Diverse Network
Connectivity



High Durability



Powerful Audio
Output



Easy Installation

Product Series		
Model No.	TP-43DC / TP-49DC	
Display		
LCD Size	43"	49"
Display Size	941×530mm	1075×606mm
Display Brand	BOE Brand / COST Brand	
Resolution	4096*4096	
Brightness	500 cd/m²	
Contrast	4000:1	
Refresh Rate	60Hz	
Motherboard Spec (Optional)		
Chipset	RK3568D	
CPU Architecture	Cortex-A55×4 2.0Ghz	
CPU Core	Quad Core	
RAM	2G	
ROM	32G	
OS	Android11.0	
Port	1* Audio, 2*USB, 1*TF Card, 1*HDMI OUT	
Electrical Spec		
Power Requirements	AC 100-240V , 50/60 Hz	
Power Consumption	65W/80W	
Standby Frequency	≤0.5W	
Audio Output Power	8Ω / 8W×2	
Network Support		
WI-FI Standard	Built-in WiFi and Bluetooth	
Ethernet	Support 10/100M adaptive Ethernet	
4G network(Optional)	Expandable 4G internet access	

Touch Control Parameters

Technology	Capacitive Touch
Input Method	Finger or Cap Stylus Touch
Touch Accuracy	<+1.5mm&<12% Jitter limit on moving
Resolution	4096*4096
Transparency	≥85%
Haze	≤3% (Maximum)
Positioning Accuracy	≥8mm Diameter
Response Time	<20ms
Surface Hardness	≥6H
Touch Point	10 Points

Weight

Model	TP-43DC	TP-49DC
N.W.	13.5KG+11KG	17.3KG+11KG
G.W.	16.5KG+12KG	22.4KG+12KG

Size


Screen Size(L x H x W)mm (Base not included)	965.2*553.4*59.6	1101.8*632*61.8
Package Size(L x H x W)mm	1090*150*710(Screen) 540*1110*500(Base)	1250*150*800(Screen) 540*1110*500(Base)
Standby power consumption	<3W	

Accessories

Accessories	Power Cord×1 Remote Control×1
-------------	----------------------------------

Product Dimension Diagram

TP-43DC

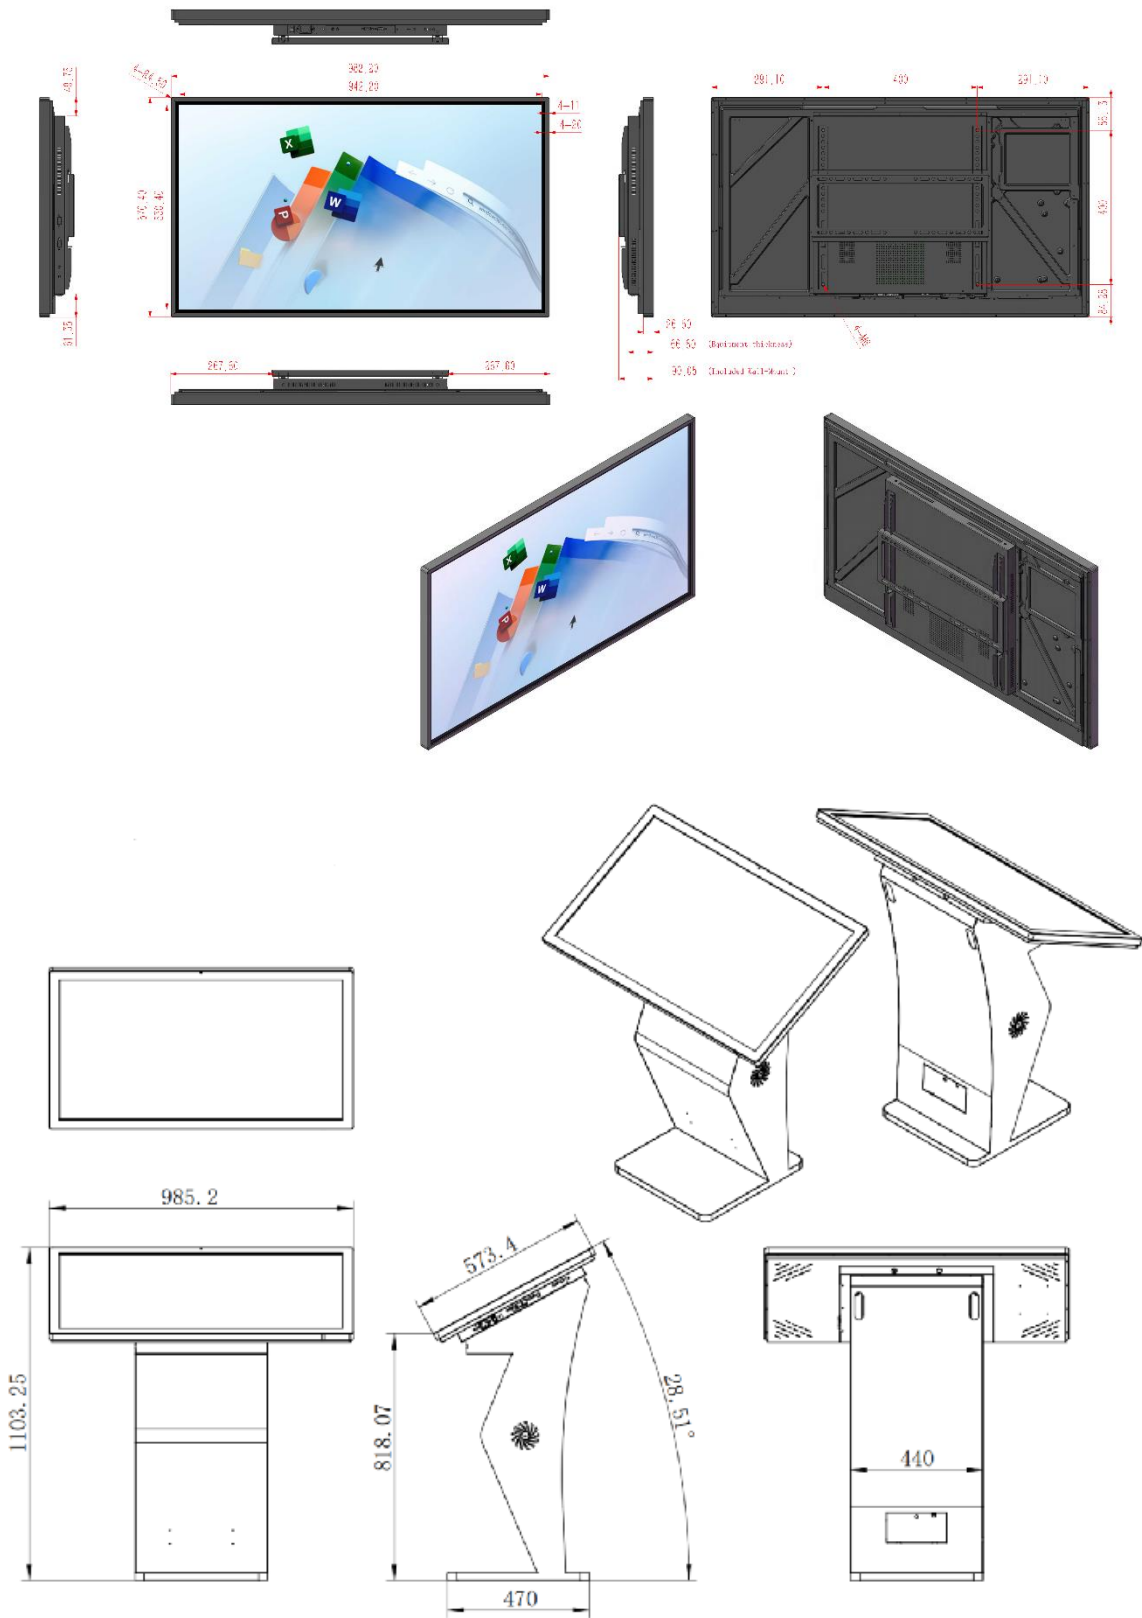

TP-49DC

